



ABSOLUTE Digimatic Indicator ID-C SERIES 543 — Calculation Type

Functions

• Calculation $f(x') = Ax' + B + Cx'^{-1}$
($x' = x + \text{offset}$)

• Peak detection (MAX/MIN)

• Runout (MAX - MIN) Hold

Note: Peak detection

1) Sampling rate: 10 readings/s

2) Capturing speed: 10 $\mu\text{m/s}$ (max.)

Settings can be changed to:

1) Sampling rate: 50 readings/s

2) Capturing speed: 50 $\mu\text{m/s}$ (max.)

• Zero-setting (INC system)

• Preset (ABS system)

• Tolerance judgment

(3 pairs of ABS, INC memory function)

• Analog bar resolution selectable

• Key lock

• Display hold (when no external device is connected)

• Data output

• External PC setting input

• Display rotation (330°)

• Low battery voltage alarm display

• Error alarm display

• Resolution switching*

| Resolution (mm) | | | Resolution (in) | | |
|-----------------|-------|-----|-----------------|--------|-------|
| 0.0002 | 0.005 | 0.1 | 0.00001 | 0.0002 | 0.005 |
| 0.0005 | 0.01 | 0.2 | 0.00002 | 0.0005 | 0.01 |
| 0.001 | 0.02 | 0.5 | 0.00005 | 0.001 | 0.02 |
| 0.002 | 0.05 | 1 | 0.0001 | 0.002 | 0.05 |

* Since the calculation resolution is one micrometer (0.001 mm), using sub-micrometer resolution settings may result in the 4th-place digit being unreliable, particularly when B is set to a very low value and C=0. It does not change at all with certain combinations of calculation coefficient (for example, A=1, B=C=0). The 3rd-place digit representing micrometers (if displayed) is always reliable.

Optional Accessories

• Lifting

Lifting lever **21EZA198**

Lifting knob **21EZA105**

• SPC Cable:

905338 (1 m)

905409 (2 m)

• USB Input Tool Direct (2 m): **06AFM380F**

• Input Tool Series

IT-020U (USB Keyboard Signal Conversion Type):

264-020

IT-007R (RS-232C Communication Conversion Type):

264-007

• Connecting Cables for **U-WAVE-T** (160 mm):

02AZD790F

For foot switch: **02AZE140F**

• Digimatic Mini-Processor **DP-1VA** **LOGGER: 264-505**

• Parameter setup kit: **21EZA313**

Note: Parameter setting software (can be downloaded for free from the Mitutoyo website) is also required.

- Calculation function operates on spindle displacement. Entering the appropriate formula factors for a fixture dedicated to the application enables direct measurement readout, thereby eliminating any need for the conversion tables previously needed for those applications where fixtures are typically used.
- Five buttons, status icons, and clear button indications allow for easy operation of a wide variety of functions.
- Wide LCD and new analog bar graph are now standard on all models.

- The ABS (absolute) scale restores the last origin position* automatically when the indicator is turned on, and realizes high reliability by eliminating over-speed errors.
- By using the parameter setup kit (optional) and the dedicated software, the functions and the parameters can be configured using a computer.
- Equipped with a data output port that enables incorporation into measurement networking and statistical process control systems. (Refer to page A-3)

* Refer to "Origin Setting of Digimatic Indicators" on page F-25.



543-342B-10

SPECIFICATIONS

□ Metric □ ISO/JIS type □ ASME/ANSI/AGD type

| Order No. | Range (mm) | Resolution (selectable) | Maximum permissible error*1 (mm) | | | Measuring force MPL (N) | Power supply | Battery life (normal use)*4 | Net mass (g) |
|--------------------|------------|-------------------------|----------------------------------|-----------------------------|--------------------------------|-------------------------|----------------|-----------------------------|--------------|
| | | | MPE _E *2 | Hysteresis MPE _H | Repeatability MPE _R | | | | |
| 543-340B-10 | 12.7 | 12 steps*4 | 0.003 | 0.002 | 0.002 | CR2032x1 pc. | Approx. 1 year | 170 | |
| 543-590B-10 | 25.4 | | | | | | | | |
| 543-595B-10 | 50.8 | | 0.006 | 2.3 or less*3 | 260 | | | | |

| Order No. | Range | Resolution (selectable) | Maximum permissible error*1 | | | Measuring force MPL (N) | Power supply | Battery life (normal use)*4 | Net mass (g) |
|--------------------|----------|-------------------------|-----------------------------|-----------------------------|--------------------------------|-------------------------|----------------|-----------------------------|---------------|
| | | | MPE _E *2 | Hysteresis MPE _H | Repeatability MPE _R | | | | |
| 543-341B-10 | 0.5 in | 12 steps*4 | ±0.0001 in /0.003 mm | 0.0001 in /0.002 mm | 0.0001 in /0.002 mm | CR2032x1 pc. | Approx. 1 year | 170 | |
| 543-342B-10 | /12.7 mm | | | | | | | | |
| 543-591B-10 | 1 in | | ±0.00025 in /0.006 mm | 1.8 or less*3 | 190 | | | | |
| 543-592B-10 | /25.4 mm | | | | | | | | |
| 543-596B-10 | 2 in | | | | | | | | 2.3 or less*3 |
| 543-597B-10 | /50.8 mm | | | | | | | | |

*1 Valid for resolution set to 0.001 mm/0.00005 in and coefficients A=1, B=0 and C=0.



*2 Error of indication for the total measuring range

*3 Applies for a spindle orientation between the spindle pointing vertically downward to the spindle horizontal.

*4 Applies only if not connected to a data processor. Battery life depends on use of the indicator. Use the above value as a guide only. Note: Flat-back type only.

Digimatic Indicators

DIMENSIONS

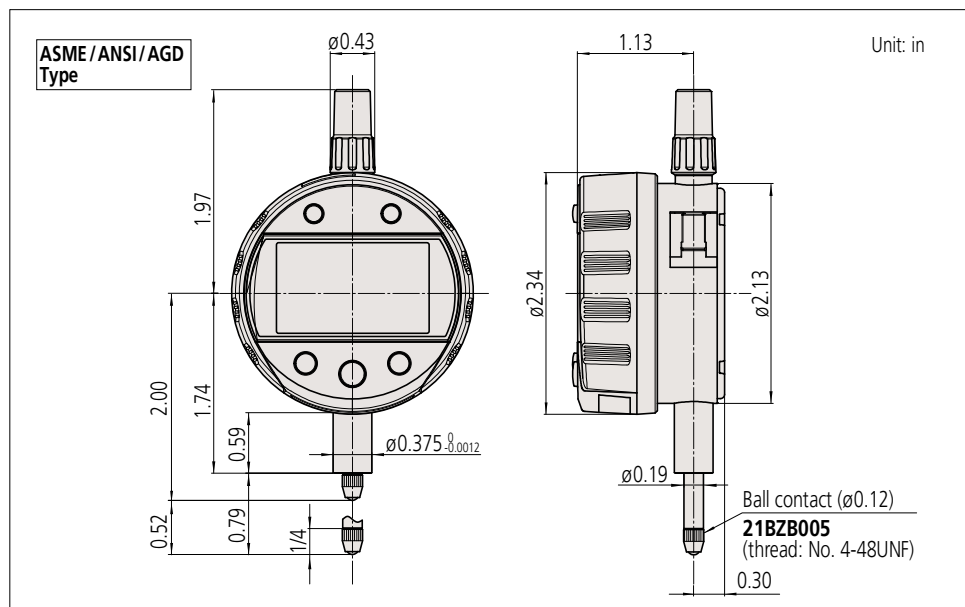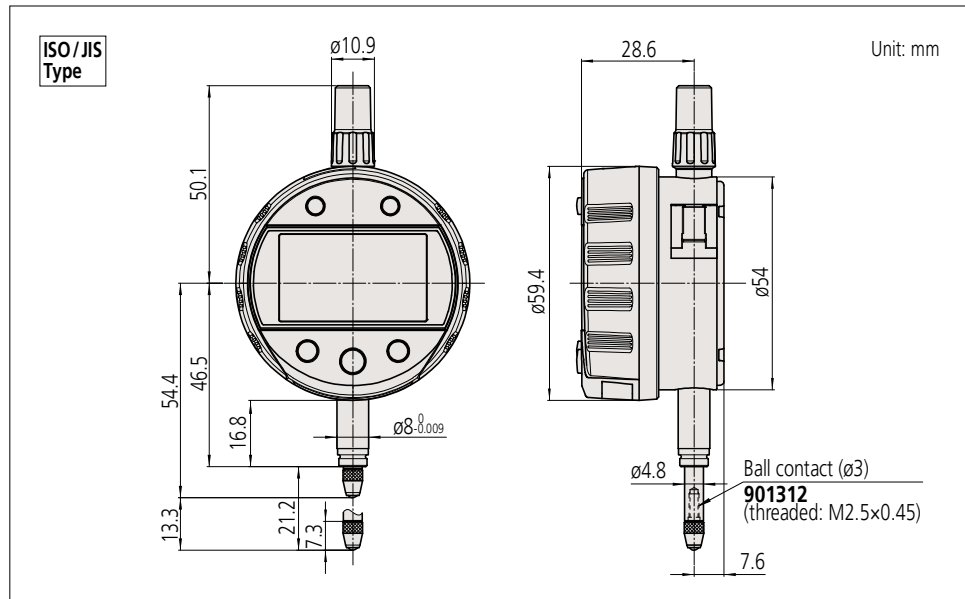

F